



YANMAR®



MARINE TRANSMISSION


KMH50V (Hydraulic Clutch)

SPECIFICATIONS

MODEL	KMH50V				
Clutch Type	Hydraulically actuated multi-disc clutch				
Input torque capacity Nm (ft lb) (max. rpm)	660 Nm (487 ft lb) (5500 rpm)				
Reduction ratio	Forward	1.22	1.58	2.08	2.47
	Reverse	1.22	1.58	2.08	2.47
Direction of rotation (viewed from stern)	Input shaft	Counter-clockwise			
	Output shaft	Clockwise and Counter-clockwise			
Lubricating oil	SAE #30 (single grade oil)				
Lubricating oil capacity	5.4 liter (5.7 qt)				
Dry weight	58 kg (127 lb) <small>(with Borg Warner flange, without foot)</small>				

"Borg Warner is standard flange". (Option: SAE# size available) Electric/Mechanical Trolling Valve, Electric Shift and/or PTO available as option.

Power Diagram for Pleasure Use

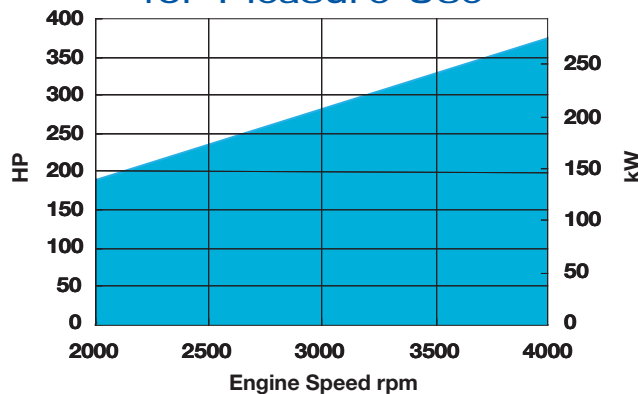

YANMAR®

Address: Brugplein 11
1332 BS Almere
Netherlands

Postaddress: Postbus 30112
1303 AC Almere
Netherlands

Internet: www.yanmarmarine.com

